
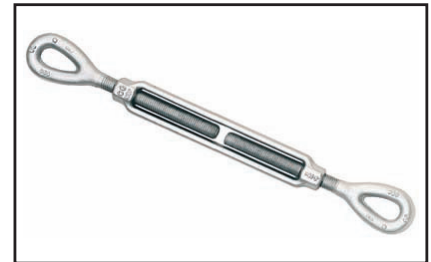


Turnbuckles | 500 - 75,000 Lbs. | Eye & Eye

- End fittings are Quenched and Tempered, bodies heat treated by normalizing.
- Hot dip galvanized steel.
- Turnbuckle eyes are forged elongated, by design, to maximize easy attachment in system and minimize stress in the eye. For turnbuckles sizes 1/4" through 2-1/2", a shackle one size smaller can be reeved through the eye.

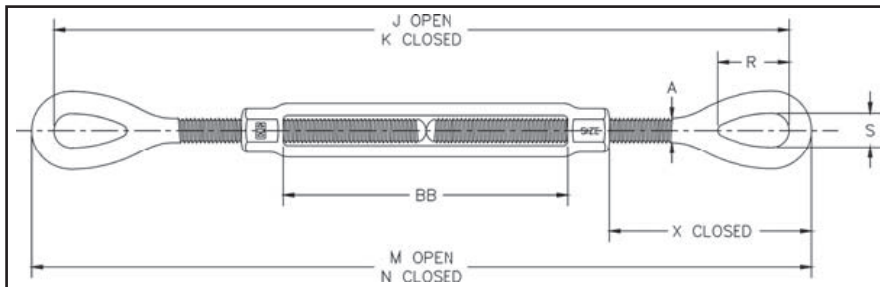

Meets the performance requirements of Federal Specifications FF-T-791b, Type 1, Form 1 – Class 4, and ASTM F-1145, except for those provisions required of the contractor.

Specifications												
Thread Diameter & Take Up (in.)	Model Number	Working Load Limit (lbs.)	Weight Each (lbs.)	Dimensions (in.)								
				A	J (open)	K (closed)	M (open)	N (closed)	R	S	X (closed)	BB
1 1/2 x 12	1031699	21,400	28.70	1.50	44.24	32.24	46.74	34.74	4.09	2.12	9.46	12.32
1 1/2 x 18	1031715	21,400	34.10	1.50	56.24	38.24	58.74	40.74	4.09	2.12	9.46	18.32
1 1/2 x 24	1031733	21,400	39.60	1.50	68.86	44.86	71.36	47.36	4.09	2.12	9.46	24.94
2 x 24	1031819	37,000	83.50	2.00	75.68	51.68	79.18	55.18	5.81	2.69	13.03	24.48
2 3/4 x 24	1031859	75,000	174.00	2.75	81.34	57.34	85.84	61.84	7.00	3.25	15.09	24.65

* Proof load is 2.5 times the working load limit. Ultimate load is 5 times the working load limit.

+ Mechanical Galvanized

Green shading reflects rental inventory.