
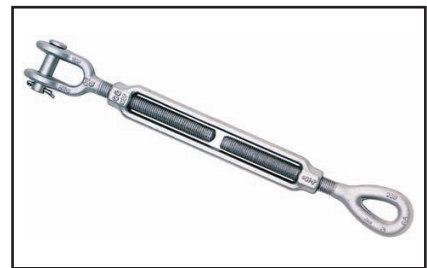


Turnbuckles | 500 - 75,000 Lbs. | Jaw & Eye

- End fittings are Quenched and Tempered, bodies heat treated by normalizing.
- Hot dip galvanized steel.
- Turnbuckle eyes are forged elongated, by design, to maximize easy attachment in system and minimize stress in the eye. For turnbuckles sizes 1/4" through 2-1/2", a shackle one size smaller can be reeved through the eye.
- Forged jaw ends are fitted with bolts and nuts for 1/4" through 5/8" and pins and cotters on 3/4" through 2-3/4" sizes

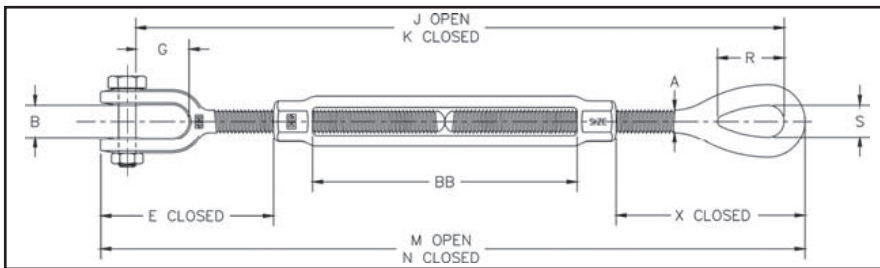

Meets the performance requirements of Federal Specifications FF-T-791b, Type 1, Form 1 – Class 4, and ASTM F-1145, except for those provisions required of the contractor.

Specifications															
Thread Diameter & Take Up (in.)	Model Number	Working Load Limit (lbs.)	Weight Each (lbs.)	Dimensions (in.)											
				A	B	E (closed)	G	J (open)	K (closed)	M (open)	N (closed)	R	S	X (closed)	BB
1 1/2 x 18	1032331	21,400	36.00	1.50	2.06	8.93	2.81	54.50	36.50	58.21	40.21	4.09	2.12	9.46	18.32
1 1/2 x 24	1032359	21,400	41.50	1.50	2.06	8.93	2.81	67.12	43.12	70.83	46.83	4.09	2.12	9.46	24.94
2 3/4 x 24	1032475	75,000	187.00	2.75	3.69	14.92	4.19	78.05	54.05	85.67	61.67	7.00	3.25	15.09	24.65

* Proof load is 2.5 times the working load limit. Ultimate load is 5 times the working load limit.

+ Mechanical Galvanized

Green shading reflects rental inventory.