
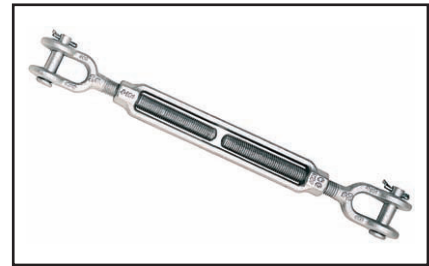


Turnbuckles | 500 - 75,000 Lbs. | Jaw & Jaw

- End fittings are Quenched and Tempered, bodies heat treated by normalizing.
- Hot dip galvanized steel.
- Turnbuckle eyes are forged elongated, by design, to maximize easy attachment in system and minimize stress in the eye. For turnbuckles sizes 1/4" through 2-1/2", a shackle one size smaller can be reeved through the eye.
- Forged jaw ends are fitted with bolts and nuts for 1/4" through 5/8" and pins and cotters on 3/4" through 2-3/4" sizes

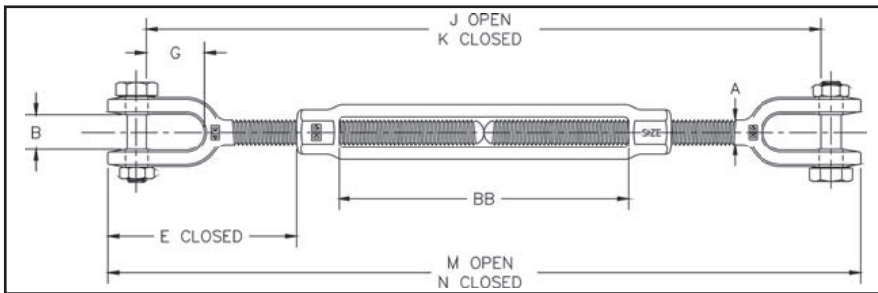

Meets the performance requirements of Federal Specifications FF-T-791b, Type 1, Form 1 – Class 4, and ASTM F-1145, except for those provisions required of the contractor.

Specifications

Thread diameter & Take Up (in.)	Model Number	Working Load Limit (lbs.)	Weight Each (lbs.)	Dimensions (in.)								
				A	B	E (closed)	G	J (open)	K (closed)	M (open)	N (closed)	BB
1 1/4 x 18	1032894	15,200	25.90	1.25	1.84	8.09	2.82	51.37	33.37	55.58	37.58	18.06
1 1/4 x 24	1032910	15,200	29.80	1.25	1.84	8.09	2.82	63.93	39.93	68.14	44.14	24.62
1 1/2 x 18	1032956	21,400	38.00	1.50	2.06	8.93	2.81	52.76	34.76	57.68	39.68	18.32
1 1/2 x 24	1032974	21,400	43.50	1.50	2.06	8.93	2.81	65.38	41.38	70.30	46.30	24.94
1 3/4 x 18	1033018	28,000	53.50	1.75	2.60	9.36	3.35	53.35	35.35	59.16	41.16	18.37
2 x 24	1033054	37,000	96.30	2.00	2.62	11.80	3.74	69.64	45.64	76.72	52.72	24.48
2 1/2 x 24	1033072	60,000	167.00	2.50	3.06	13.26	4.44	72.97	48.97	82.18	58.18	24.60
2 3/4 x 24	1033090	75,000	199.00	2.75	3.69	14.92	4.19	74.75	50.75	85.50	61.50	24.65

*Proof load is 2.5 times the working load limit. Ultimate load is 5 times the working load limit.

+ Mechanical Galvanized

Green shading reflects rental inventory.